



TYPE B66 STANDARD CURB AND GUTTER

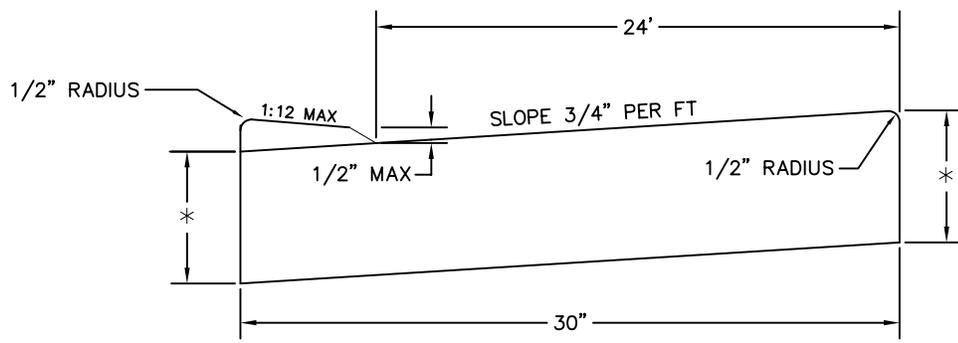

DROP TYPE CURB AND GUTTER

SEE PLATE NUMBER 650.04 FOR CURB OPENING REQUIREMENTS
WHEN CURB AND GUTTER IS POURED IN LIEU OF FILLETS AT INTERSECTIONS.

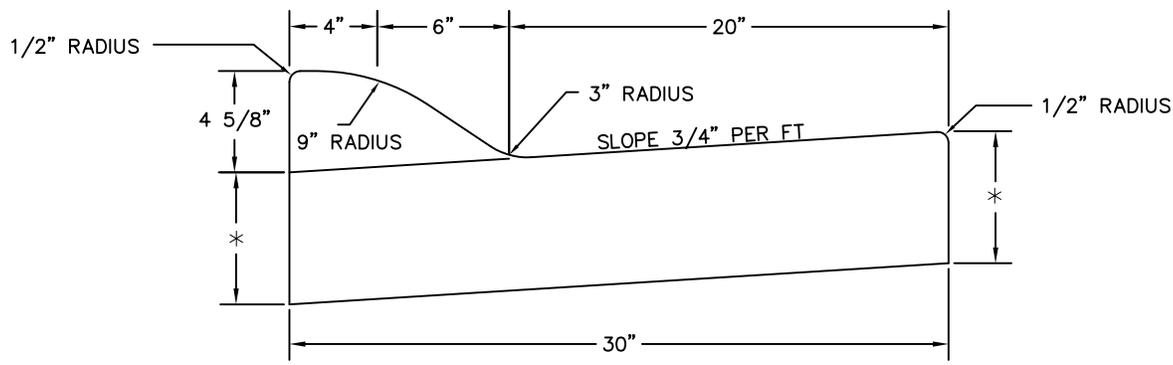

TYPE BL CURB AND GUTTER

(OPTIONAL IN CUL-DE-SACS ONLY)

* THICKNESS SHALL BE EQUAL TO THE DEPTH OF THE ADJOINING
PAVEMENT BUT NOT LESS THAN 6".

GENERAL

ON PCC PAVEMENT A LONGITUDINAL CONSTRUCTION JOINT WITH TIE
BARS SHALL BE USED WHEN CURB AND GUTTER IS POURED SEPARATELY.
M-6 CONCRETE SHALL BE USED IN THE CONSTRUCTION OF THE CURB AND GUTTER.

Revised: April 2008

City of Madison
Engineering Department
Typical Curb and Gutter
Cross Sections



PO Box 308
116 W. Center Street
Madison, SD 57042
Phone: (605)256-7514
Fax: (605)256-7511