



KEYWAY CONSTRUCTION
JOINT WITHOUT TIE BARS
(DO NOT TIE).

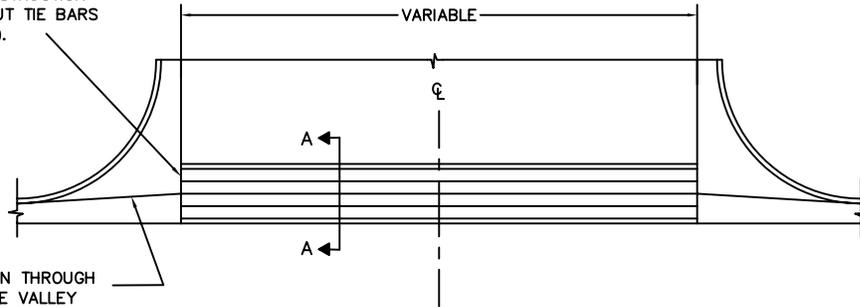

FLOW LINE SHALL RUN THROUGH
CENTER OF CONCRETE VALLEY
GUTTER (NOT CONSTRUCTION JOINT).

#4 DEFORMED REBARS AT
12" ON CENTER BOTH WAYS.

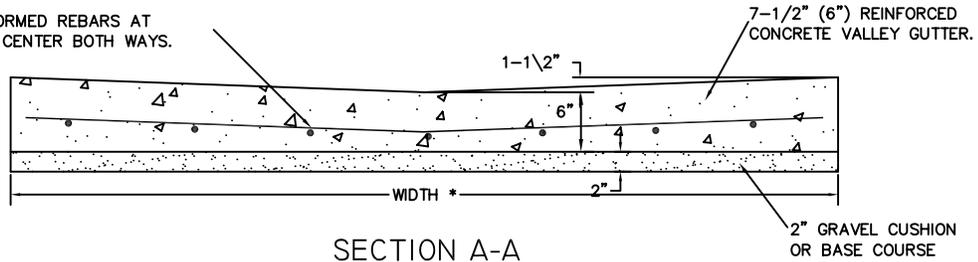

SECTION A-A

NOTES:

- ALL REBAR SHALL BE EPOXY COATED
- REFER TO PLANS FOR LENGTH OF VALLEY GUTTER
- ALL REBAR WILL BE TIED AND IN PLACE. (NOT A PAY ITEM)
- * WIDTH SHALL BE 6'0" MINIMUM ON RESIDENTIAL STREETS. 8'0" MINIMUM WHERE USED ADJACENT TO OR ON COLLECTOR STREETS.

City of Madison
Engineering Department
CONCRETE_VALLEY
GUTTER_DETAIL



April 2008

PO Box 308
116 W. Center Street
Madison, SD 57042
Phone: (605)256-7514
Fax: (605)256-7511